


VULCAN® XC72R SPECIALTY CARBON BLACK

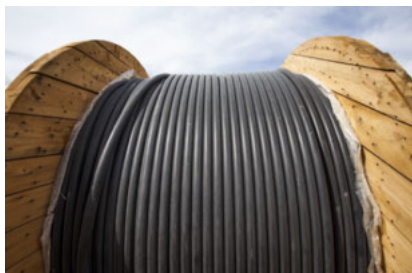

Product Highlights

VULCAN XC72R specialty carbon black is a fluffy form of Cabot's VULCAN XC72 conductive carbon black. Its unique properties allow end products to deliver functionality at relatively lower loading levels compared to Cabot's other carbon blacks in the XC family. VULCAN XC72R specialty carbon black has good chemical and physical cleanliness, good processability, as well as low sulfur content and ionic contamination.

Compared to other conductive grades of carbon black, VULCAN XC72R specialty carbon black is typically easier to disperse. In addition to conductivity, VULCAN XC72R specialty carbon black will also allow a high level of jetness in end products.

Key Applications

VULCAN XC72R specialty carbon black is suitable for use across a range of conductive applications:

- ◆ Power storage, including batteries and fuel cells
- ◆ Conductive paper
- ◆ Conductive liquid dispersions
- ◆ Catalyst support

Performance Features

VULCAN XC72R specialty carbon black has several important features:

- ◆ A full range of conductivity performance depending on loading (but typically at lower loadings than other XC carbon blacks or standard carbon blacks)
- ◆ Good dispersion characteristics to promote surface smoothness and preserve mechanical performance of polymer
- ◆ Low sulfur and grit levels
- ◆ Easier to disperse fluffy form

The dispersibility of VULCAN XC72R specialty carbon black will depend on the equipment used and the formulation.

A product with similar morphology, VULCAN XC72 specialty carbon black, is available in an easier to handle pelleted form.

VULCAN® XC72R SPECIALTY CARBON BLACK

TYPICAL PROPERTIES		
PROPERTY	TYPICAL VALUES	TEST METHOD
Iodine Number (mg/g)	253	ASTM D1510
OAN (cc/100g)	192	ASTM D2414
325 mesh residue (ppm)	<10	ASTM D1514
Tint (%)	87	ASTM D3265

The data in the table above are typical test values intended as guidance only; they are not product specifications. Product specifications are available upon request from your Cabot representative.

Product Form & Logistics

- ◆ Product Form: Powder
- ◆ Regional availability: Global
- ◆ Bag Packaging Options: 5 kg bags
- ◆ Bulk Packaging Options: Multiple

For information on product-specific storage conditions, please refer to the applicable Safety Data Sheet (SDS) available from your Cabot representative.

For information on product-specific storage conditions, please refer to the applicable Safety Data Sheet (SDS) available from your Cabot representative or at cabotcorp.com.

The VULCAN name is a registered trademark of Cabot Corporation.

NORTH AMERICA
Business & Technology Center
157 Concord Road
Billerica, MA 01821-7001
United States
T +1 800 462 2313
F +1 978 670 7035

SOUTH AMERICA
Cabot Brasil Industria e
Comercio Ltda.
Rua do Paraíso 148 - 5ª andar
04103-000 São Paulo
Brazil
T +55 11 2144 6400
F +55 11 3253 0051

EUROPE
SIA Cabot Latvia
101 Mukusalas Street
LV-1004 Riga
Latvia
T +371 670 50 900
F +371 670 50 985

MIDDLE EAST/AFRICA
Cabot Specialty Chemicals
Jebel Ali Free Zone
LOB 15, Office 424, Dubai
United Arab Emirates
T +971 4 8871 800
F +971 4 8871 801

ASIA PACIFIC
Cabot China Ltd.
558 Shuangbai Road
Minghang District
Shanghai 201108
China
T +86 21 5175 8800
F +86 21 6434 5532

JAPAN
Cabot Specialty Chemicals, Inc.
Sumitomo Chiba-Daimon Bldg, 3F
2-5-5 Shiba Daimon,
Minato-ku, Tokyo 105-0012
Japan
T +81 6820 0255
F +81 3 5425 4500

The data and conclusions contained herein are based on work believed to be reliable, however, Cabot cannot and does not guarantee that similar results and/or conclusions will be obtained by others. This information is provided as a convenience and for informational purposes only. No guarantee or warranty as to this information, or any product to which it relates, is given or implied. This information may contain inaccuracies, errors or omissions and CABOT DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AS TO (i) SUCH INFORMATION, (ii) ANY PRODUCT OR (iii) INTELLECTUAL PROPERTY INFRINGEMENT. In no event is Cabot responsible for, and Cabot does not accept and hereby disclaims liability for, any damages whatsoever in connection with the use of or reliance on this information or any product to which it relates.